


BULLETIN 481 TIMBER WINDOWS

Amendment to cover photo to Bulletin 481:

BRANZ does not recommend that facing boards are installed in the way shown in this photo.

The two vertical facing boards should be continuous to the underside of the head flashing, with the horizontal facing board fitted between them. In this way, the exposed end grain of the facing boards are protected.

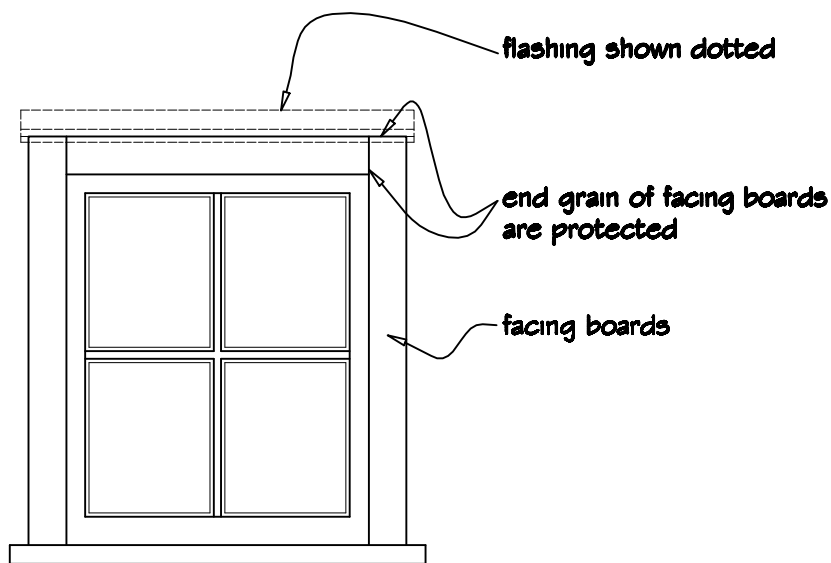

Timber Window Elevation